

## OASIS MOUNTING TO CONCRETE INSTRUCTIONS •

Two installers are required, due to weight and size of Oasis.

### COMPONENTS x 3



1. Mounting Bracket (Attaches to bottom of Oasis "A")
2. Phillips Head Fasteners (8) for Bracket (Not Shown)
3. Concrete Anchor
4. Small Washer
5. Nut
6. Large Slotted Washer
7. Red Round Paper Adhesive Dots

### TOOLS REQUIRED

- Electric Drill
- 1/2" dia. Masonry Bit
- Phillips Screwdriver or Drill Bit
- 3/4" Open-End Wrench
- Marker (Pencil, Fine Tip Felt or similar)

### INSTRUCTIONS •

1. Place Oasis upside down on a blanket or other soft surface to prevent scratching.
2. Install the (3) Mounting Brackets onto the bottom of Oasis, using the pre-drilled holes and (8) Phillips Head Fasteners provided. (See illustration 'A')
3. Place Oasis into position.
4. Mark the center hole of each Mounting Bracket by **CAREFULLY placing the Red Round Dots onto the floor.**
5. Remove Oasis and place on blanket.
6. Mark center of Red Labels for accurate drilling.
7. Drill 1/2" dia. hole 1-3/4" deep. Install concrete anchors (3). **NOTE! ALL THREADS MUST BE EXPOSED!**
- NOTE! DO NOT REMOVE NUT & SMALL WASHER from ANCHORS**
8. Place Oasis over the anchors. (Hole in Mounting Bracket goes over Anchor with Washer & Nut attached.
9. Slide Slotted Washer, **depression side down**, between the Mounting Bracket and Small Washer.
10. Using 3/4" open-end wrench, tighten Nuts.
11. Stand back and admire your work.

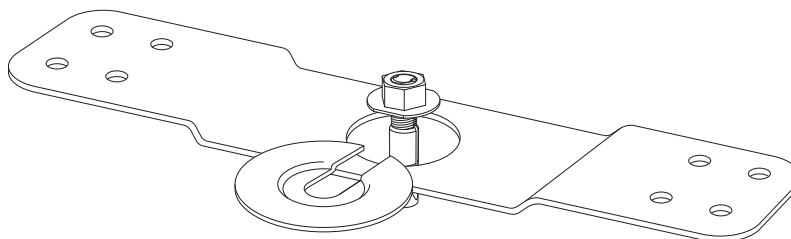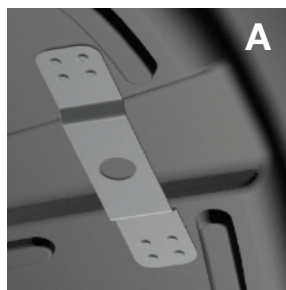

## OASIS CLEANING and MAINTENANCE INSTRUCTIONS •

For best results clean with mild soap and water.

**DO NOT USE CLEANERS CONTAINING CITRUS OILS!** (Orange and Lemon Cleaners)

### Acceptable Cleaners Key •

1 = No attack anticipated    1- 2 = Minimum attack, generally useable    2 = Preferably, Do not use

Fantastic .....	1	Formula 409 .....	1- 2
Krazy Clean .....	1	25% Isopropanol /Water .....	1- 2
Windex Glass Cleaner .....	1	RM-900 Pre-Klean .....	1- 2
ZEP Formula 50 All Purpose .....	1	Simple Green-Diluted .....	2
Plexus Plastic Cleaner .....	1	ArmorAll Cleaner .....	2
Murphy Household .....	1	ArmorAll Protectant .....	2
Mineral Sprits .....	1	Clorox Cleanup .....	2
Ammonia Diluted 1:3 with Water .....	1	Paint Thinner .....	2
30% Acetone/Water .....	1	Turpentine .....	2
PPG DX-330 Acrylic Clean .....	1		

Testing results based on applying test material for 48 hours and examining for chemical attack, breaking, cracking, and/or crazing.

